

HOME

SERIES



Vertical
Ultra

BRINGING RADIATOR STYLE INTO UK HOMES

50 Δ t

(75/65/20°C)




Front Panel Height mm	Emitter Height mm	Front Panel Length mm	Emitter Length mm	Stelrad UIN	Watts	Heat output Btu/hr
1040	1000	470	400	86110224h	857	2924
		570	500	86110225h	1071	3654
		670	600	86110226h	1285	4384
1240	1200	470	400	86112224h	999	3409
		570	500	86112225h	1249	4262
		670	600	86112226h	1499	5115
1840	1800	470	400	86118224h	1476	5036
		570	500	86118225h	1845	6295
		670	600	86118226h	2214	7554
2040	2000	470	400	86120224h	1584	5405
		570	500	86120225h	1980	6756
		670	600	86120226h	2376	8107

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV



UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE - 10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE - 1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE - 15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME - 10MM
14531412	CENTRE TAP TRV STRAIGHT CHROME - 1/2IN
14531415	CENTRE TAP TRV STRAIGHT CHROME - 15MM
14531510	CENTRE TAP TRV ANGLED L WHITE - 10MM
14531512	CENTRE TAP TRV ANGLED L WHITE - 1/2IN
14531515	CENTRE TAP TRV ANGLED L WHITE - 15MM
14531610	CENTRE TAP TRV ANGLED L CHROME - 10MM
14531612	CENTRE TAP TRV ANGLED L CHROME - 1/2IN
14531615	CENTRE TAP TRV ANGLED L CHROME - 15MM

ULTRA TOWEL RAIL BAR

Fits emitter length	Stelrad UIN	Radiator Height	Max no. of bars
400mm wide	83200004	1000	1
500mm wide	83200005	1200	2
600mm wide	83200006	1800	3
		2000	3

Towel rail bar is 120mm wider than actual radiator.

Maximum three towel rail bars per radiator.

For more information visit www.stelrad.com



WARRANTY





MADE TO ORDER





LEAD TIME FOR COLOUR OPTIONS

WALL MOUNTING INFORMATION

All dimensions in mm

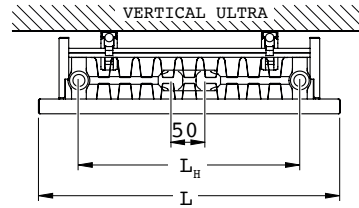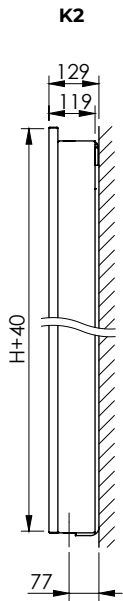


L_H	344	444	544
L	470	570	670



CONNECTIONS

Each radiator comes with ½" inlet connections as standard.


PIPE CONNECTIONS

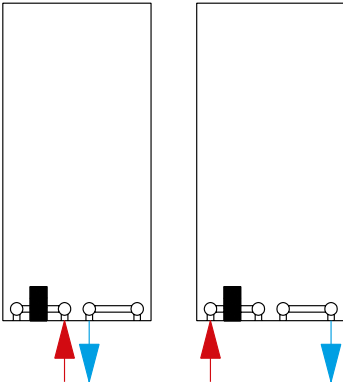

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	T22 (K2)			
	1000	1200	1800	2000
Height (mm)	1000	1200	1800	2000
W/m at 75/65/20	2142	2498	3690	3960
n-coefficients	1.29	1.30	1.33	1.33
Heated surface area (m ² /m)	26.23	27.15	29.90	37.74
Weight (kg/m)	59.40	71.80	105.30	116.40
Water contents (l/m)	10.30	12.30	15.90	17.70
KM	13.62	15.66	20.70	21.98

PRESSURE DROPS

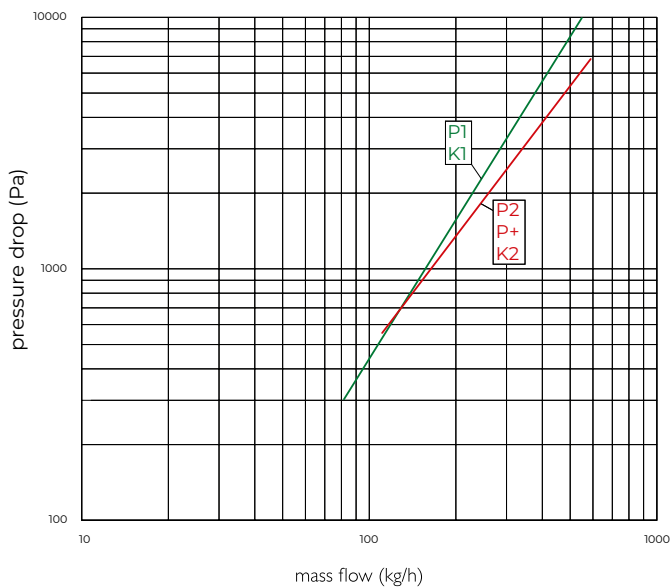

Type	Kv
P1 / K1	1.60
P2 / P+ / K2	1.85

NATURAL COLOURS



METALLIC COLOURS



RAL COLOURS



To request up to 5 colour samples, please email sales@stelrad.com with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLORCHART.COM

 RAL 9016** Traffic white comes as standard on all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email sales@stelrad.com