

HOME

SERIES



Classic
Compact
900

BRINGING RADIATOR STYLE INTO UK HOMES

CLASSIC COMPACT 900



50 Δ t

(75/65/20°C)

K1



P+



K2





Height mm	Length mm	Sections	K1			P+			K2		
			Stelrad UIN	Heat output Watts	Btu/hr	Stelrad UIN	Heat output Watts	Btu/hr	Stelrad UIN	Heat output Watts	Btu/hr
900	400	9	3091104h	544	1856	-	-	-	3092204h	958	3269
	500	12	3091105h	680	2320	-	-	-	3092205h	1198	4088
	600	15	3091106h	816	2784	-	-	-	3092206h	1437	4903
	700	18	3091107h	952	3248	-	-	-	3092207h	1677	5722
	800	21	3091108h	1088	3712	-	-	-	3092208h	1916	6537
	900	24	3091109h	1224	4176	-	-	-	3092209h	2156	7356
	1000	27	3091110h	1360	4640	-	-	-	3092210h	2395	8172

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C.

CLASSIC COMPACT 900



40Δt
(65/55/20°C)





Height mm	Length mm	Sections	Stelrad UIN	Heat output		Stelrad UIN	Heat output		Stelrad UIN	Heat output	
				Watts	Btu/hr		Watts	Btu/hr		Watts	Btu/hr
900	400	9	3091104h	407	1388	-	-	-	3092204h	717	2445
	500	12	3091105h	509	1735	-	-	-	3092205h	896	3058
	600	15	3091106h	610	2083	-	-	-	3092206h	1075	3667
	700	18	3091107h	712	2430	-	-	-	3092207h	1254	4280
	800	21	3091108h	814	2777	-	-	-	3092208h	1433	4890
	900	24	3091109h	916	3124	-	-	-	3092209h	1613	5502
	1000	27	3091110h	1017	3471	-	-	-	3092210h	1791	6112

CLASSIC COMPACT 900



30 Δ t
(55/45/20°C)




Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts Btu/hr		Stelrad UIN	Heat output Watts Btu/hr		Stelrad UIN	Heat output Watts Btu/hr	
900	400	9	3091104h	280	956	-	-	-	3092204h	493	1683
	500	12	3091105h	350	1195	-	-	-	3092205h	617	2105
	600	15	3091106h	420	1434	-	-	-	3092206h	740	2525
	700	18	3091107h	490	1673	-	-	-	3092207h	864	2947
	800	21	3091108h	560	1912	-	-	-	3092208h	987	3367
	900	24	3091109h	630	2151	-	-	-	3092209h	1110	3788
	1000	27	3091110h	700	2390	-	-	-	3092210h	1233	4208

CLASSIC COMPACT 900



WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.
Floor mounting brackets available.

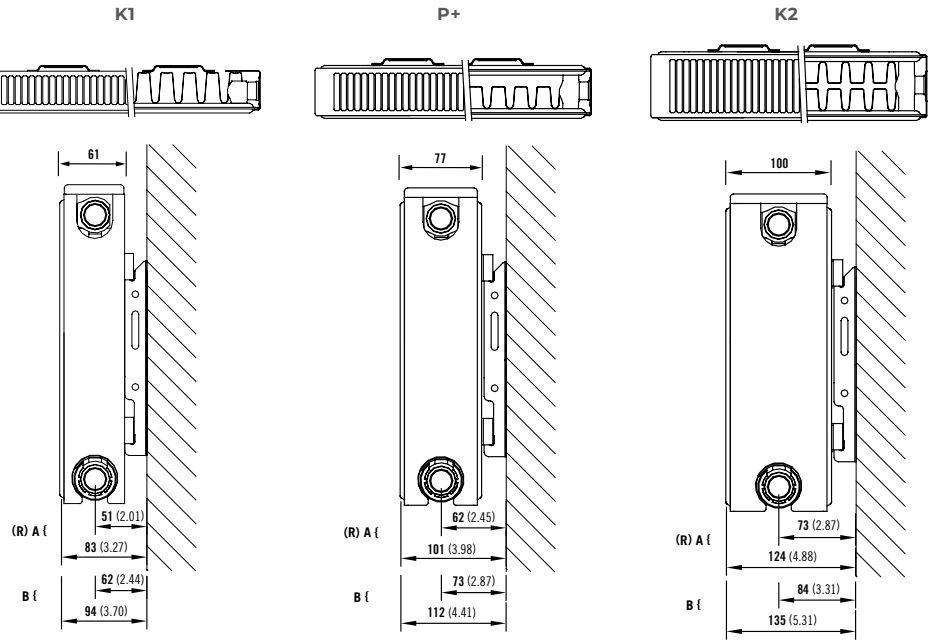

BRACKET POSITION


A = Closest to wall B = Furthest from wall (R) = Recommended mounting position.

CLASSIC COMPACT 900



COMPACT MOUNTING BRACKETS


All dimensions in mm. Inches in brackets. Floor mounting brackets available.

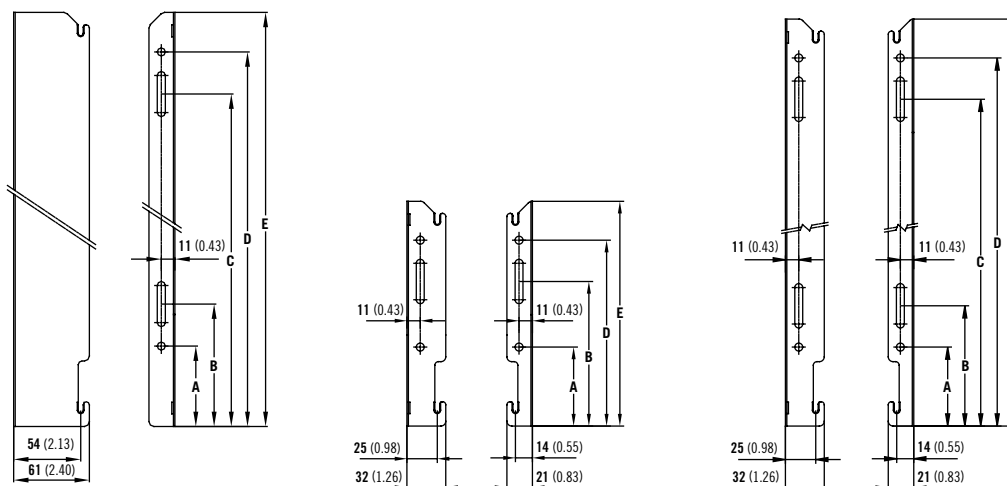

Dimensions	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches
Height	300	11.81	500	17.72	600	23.62	700	27.56	900	35.43
A	65	2.56	65	2.56	65	2.56	65	2.56	65	2.56
B	119	4.69	99	3.90	99	3.90	99	3.90	99	3.90
C	-	-	269	10.59	419	16.50	519	20.43	719	28.31
D	153	6.02	303	11.93	453	17.83	553	21.77	753	29.65
E	185	7.28	335	13.19	485	19.09	585	23.03	785	30.91

K1, P+ AND K2 LUG POSITIONS

All dimensions in mm. Inches in brackets.

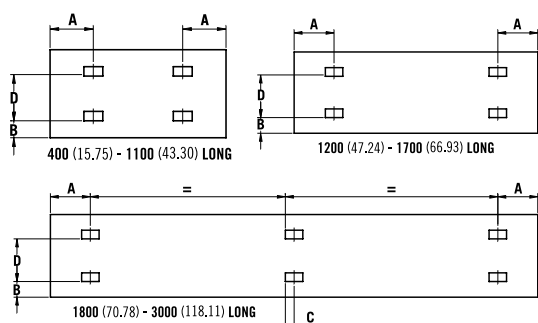

P+ & K2

Dimensions	mm	in
A	133	5.24
B	60	2.36

K1

Dimensions	mm	in
A 400mm	117	4.61
A 500 - 3000mm	150	5.91
B 400 - 3000mm	60	2.36
C 1800 - 3000mm	17	0.67

PANEL HEIGHT

mm	in	mm	in
300	11.81	153	6.02
500	17.72	303	11.93
600	23.62	453	17.83
700	27.56	553	21.77
900	35.43	753	29.65


CLASSIC COMPACT 900



CONNECTIONS

Each radiator comes with ½" inlet connections as standard.


PIPING OPTIONS

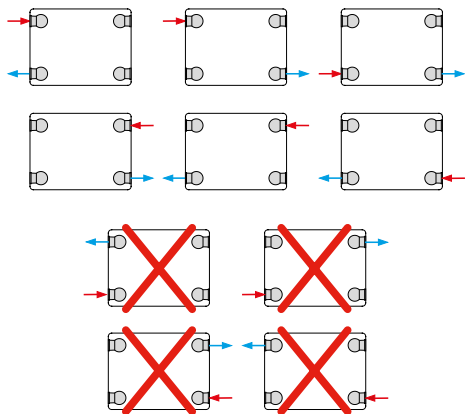

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1					P+				K2				
Height	300	500	600	700	900	300	500	600	700	300	500	600	700	900
W/m at 75/65/20	509	756	980	1117	1360	745	1055	1345	1530	982	1371	1732	1961	2395
n-coefficients	1.32	1.31	1.29	1.29	1.29	1.33	1.33	1.34	1.34	1.33	1.33	1.33	1.34	1.34
Heated surface area (m²/m)	2.09	3.37	4.66	5.51	7.22	2.44	3.84	5.24	6.18	3.51	5.62	7.74	9.15	11.97
Weight (kg/m)	9.31	14.51	19.70	22.90	29.30	14.29	22.04	29.80	34.50	16.80	25.90	35.00	40.53	51.60
Water contents (l/m)	1.89	2.57	3.25	3.77	4.80	3.70	5.15	6.60	7.63	3.70	5.15	6.60	7.63	9.70
Wall to tap centre (mm)	51	51	51	51	51	62	62	62	62	73	73	73	73	73

PRESSURE DROPS

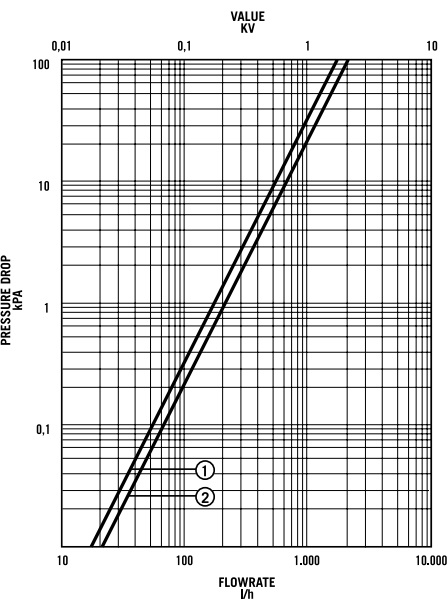

- ① Type 10 (P1), 11 (K1)
② Type 21 (P+), 22 (K2)