

HOME

SERIES



Caliente
Rail

BRINGING RADIATOR STYLE INTO UK HOMES

CALIENTE RAIL

50Δt

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output	Btu/hr
755	450	407501450h	389		1327
	500	407501500h	431		1471
	600	407501600h	517		1764
	750	407501750h	645		2201
1199	450	401101450h	615		2098
	500	401101500h	675		2303
	600	401101600h	794		2709
	750	401101750h	972		3316
1791	450	401701450h	900		3071
	500	401701500h	986		3364
	600	401701600h	1158		3951
	750	401701750h	1416		4831
2013	450	402001450h	1002		3419
	500	402001500h	1099		3750
	600	402001600h	1294		4415
	750	402001750h	1586		5411


STRAIGHT DOUBLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output	Btu/hr
755	450	407502450h	565		1928
	500	407502500h	626		2136
	600	407502600h	749		2556
	750	407502750h	934		3187
1199	450	401102450h	868		2962
	500	401102500h	963		3286
	600	401102600h	1154		3937
	750	401102750h	1441		4917
1791	450	401702450h	1268		4326
	500	401702500h	1402		4784
	600	401702600h	1670		5698
	750	401702750h	2073		7073
2013	450	402002450h	1427		4869
	500	402002500h	1576		5377
	600	402002600h	1874		6394
	750	402002750h	2321		7919

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV



UIN	Elements	UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM	14531610	CENTRE TAP TRV ANGLED L CHROME -10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN	14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM	14531615	CENTRE TAP TRV ANGLED L CHROME -15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM	14531710	CENTRE TAP TRV ANGLED R WHITE -10MM*
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN	14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN*
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM	14531715	CENTRE TAP TRV ANGLED R WHITE -15MM*
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM	14531810	CENTRE TAP TRV ANGLED R CHROME -10MM*
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN	14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN*
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM	14531815	CENTRE TAP TRV ANGLED R CHROME -15MM*


Available for the Vertical Line Vertical, Flat Vertical, Caliente Rail,* Concord Rail,* Vertical Ultra, Concord Side Concept, Concord Side Chrome, Vertical Line Vertical Concept & Flat Vertical Concept.

*Angled Right Centre Tap TRV's only available for towel rails.

CALIENTE RAIL


SINGLE WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

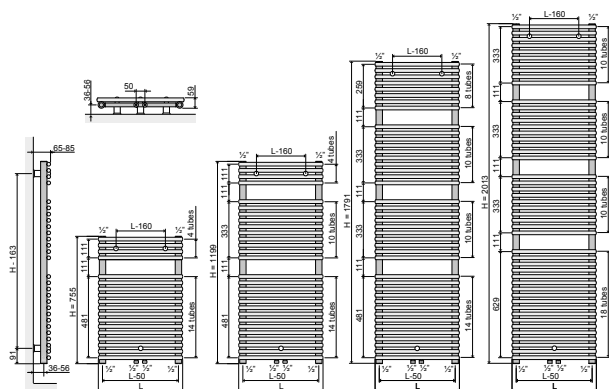

DOUBLE WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

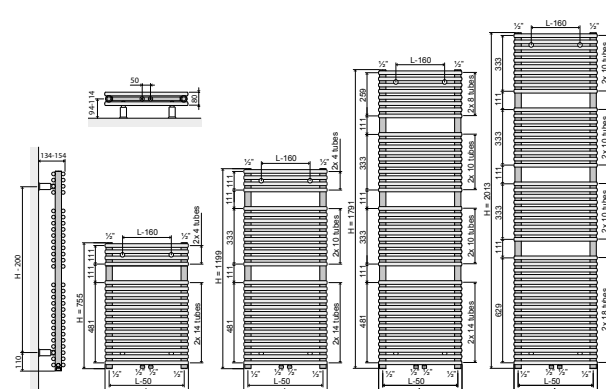


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PIPING OPTIONS

Single and Double.

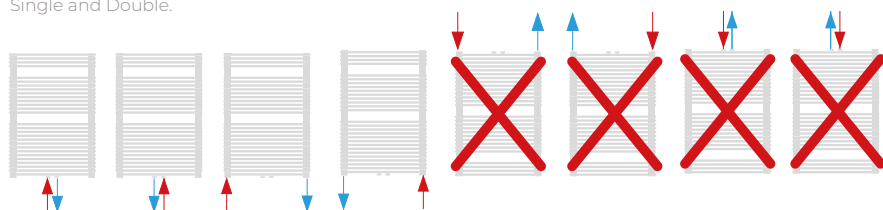

Piping options: BBOE (Bottom, Bottom, Opposite, End)

TAPPING CENTRES



EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

SINGLE

Type																
Tube Quantity	18	18	18	18	28	28	28	28	42	42	42	42	48	48	48	48
Height	755	755	755	755	1199	1199	1199	1199	1791	1791	1791	1791	2013	2013	2013	2013
Length	450	500	600	750	450	500	600	750	450	500	600	750	450	500	600	750
W/m at 75/65/20	389	431	517	645	615	675	794	972	900	986	1158	1416	1002	1099	1294	1586
n-coefficients	1.18	1.17	1.15	1.13	1.21	1.20	1.19	1.17	1.24	1.23	1.21	1.17	1.26	1.24	1.21	1.17
Heated surface area (m ² /m)	0.75	0.82	0.94	1.13	1.18	1.28	1.47	1.76	1.77	1.91	2.20	2.64	2.01	2.18	2.51	3.01
Weight (kg/m)	6.80	7.40	8.50	10.20	10.90	11.80	13.50	16.10	17.30	18.60	21.30	25.20	18.90	20.40	23.40	27.80
Water contents (l/m)	3.70	4.00	4.50	5.30	5.90	6.30	7.10	8.30	9.10	9.70	11.00	12.90	10.00	10.70	12.00	14.10

DOUBLE

Type																
Tube Quantity	2x17	2x17	2x17	2x17	2x27	2x27	2x27	2x27	2x41	2x41	2x41	2x41	2x47	2x47	2x47	2x47
Height	755	755	755	755	1199	1199	1199	1199	1791	1791	1791	1791	2013	2013	2013	2013
Length	450	500	600	750	450	500	600	750	450	500	600	750	450	500	600	750
W/m at 75/65/20	565	626	749	934	868	963	1154	1441	1269	1402	1670	2073	1427	1576	1874	2321
n-coefficients	1.21	1.21	1.20	1.19	1.23	1.23	1.22	1.21	1.25	1.24	1.23	1.20	1.25	1.24	1.23	1.21
Heated surface area (m ² /m)	1.33	1.45	1.70	2.07	2.07	2.26	2.65	3.23	3.10	3.39	3.97	4.85	3.54	3.87	4.53	5.53
Weight (kg/m)	12.47	13.59	15.82	19.17	19.40	21.14	24.61	29.82	29.15	31.75	36.94	44.72	33.20	36.14	42.01	50.82
Water contents (l/m)	6.62	7.19	8.32	10.02	10.30	11.18	12.95	15.59	15.32	16.62	19.23	23.13	17.60	19.11	22.13	26.65
Km	4.91	5.54	6.86	9.00	6.97	7.87	9.77	12.84	9.54	10.84	13.64	18.38	10.66	12.10	15.21	20.48

OPEN UP A WORLD OF COLOUR



RAL 9016
Traffic white

STANDARD COLOUR

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is now available in a variety of colours within 14 days.


RAL COLOURS



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white




9010
Pure white




9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black




7001
Silver grey




7011
Iron grey




7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey




7037
Dusty grey




7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue




5014
Pigeon blue



5015
Sky blue




5022
Night blue




5024
Pastel blue



6005
Light moss green




6018
Yellow green




6019
Pastel green



6020
Chrome green




6027
Light green



6033
Mint turquoise

Please note: the 14 day option is not applicable to configurable products.

COLOUR GUIDE



6034
Pastel turquoise




3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red




2003
Pastel orange



2008
Bright red orange



1004
Golden yellow



1016
Sulphur yellow



1021
Colza yellow



3015
Light pink




8014
Sepia



8017
Chocolate brown


METALLIC




1247M
Bronze metallic




7001M
Silver metallic




9007M
Grey metallic




7026M
Granite



1019M
Cappuccino



8028M
Terra brown



9011M
Graphite black

To request up to
5 colour samples, please
email sales@stelrad.com
or call **0800 876 6813** with your
choices and address details.

The colours shown are reproduced
as accurately as this printing
process will allow.



FOR FURTHER INFORMATION ON RAL COLOURS
PLEASE VISIT WWW.RALCOLORCHART.COM