

HOME

SERIES



Column
Horizontal
Coloured

COLUMN HORIZONTAL COLOURED

50Δt

(75/65/20°C)

Height mm	Length mm	2 COLUMN			3 COLUMN			4 COLUMN		
		Stelrad UIN	Heat output Watts	Btu/hr	Stelrad UIN	Heat output Watts	Btu/hr	Stelrad UIN	Heat output Watts	Btu/hr
300	444	-	-	-	163000h	288	983	163007h	377	1,287
	628	-	-	-	163001h	416	1,420	163008h	545	1,860
	858	-	-	-	163002h	576	1,966	163009h	754	2,573
	1042	-	-	-	163003h	704	2,403	163010h	922	3,147
	1272	-	-	-	163004h	864	2,949	163011h	1,131	3,860
	1456	-	-	-	163005h	992	3,386	-	-	-
	1870	-	-	-	163006h	1,280	4,369	-	-	-
500	444	163012h	499	1,703	163016h	464	1,584	163023h	608	2,075
	628	163013h	691	2,358	163017h	671	2,290	163024h	879	3,000
	858	163014h	845	2,884	163018h	929	3,171	163025h	1,217	4,154
	1042	163015h	1,037	3,539	163019h	1,135	3,874	163026h	1,487	5,075
	1272	-	-	-	163020h	1,393	4,754	163027h	1,825	6,229
	1456	-	-	-	163021h	1,600	5,461	-	-	-
	1870	-	-	-	163022h	2,064	7,044	-	-	-
600	444	-	-	-	163032h	548	1,870	163039h	718	2,451
	628	163028h	589	2,010	163033h	792	2,703	163040h	1,037	3,539
	858	163029h	815	2,782	163034h	1,096	3,741	163041h	1,436	4,901
	1042	163030h	997	3,403	163035h	1,340	4,573	163042h	1,756	5,993
	1272	163031h	1,223	4,174	163036h	1,644	5,611	163043h	2,155	7,355
	1456	-	-	-	163037h	1,888	6,444	-	-	-
	1870	-	-	-	163038h	2,436	8,314	-	-	-
750	444	-	-	-	-	-	-	163049h	877	2,993
	628	-	-	-	-	-	-	163050h	1,266	4,321
	858	-	-	-	163044h	1,337	4,563	163051h	1,753	5,983
	1042	-	-	-	163045h	1,635	5,580	163052h	2,143	7,314
	1272	-	-	-	163046h	2,006	6,846	163053h	2,630	8,976
	1456	-	-	-	163047h	2,303	7,860	-	-	-
	1870	-	-	-	163048h	2,972	10,143	-	-	-

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLUMN HORIZONTAL COLOURED

COLUMN HORIZONTAL FLOOR MOUNTING BRACKETS





UIN 148137 White
(sold in pairs)

FLOOR MOUNTING BRACKET INFORMATION	
400 - 1500mm	2 feet


OPTIONAL FLOOR MOUNTING BRACKETS

All dimensions in mm. Inches in brackets.

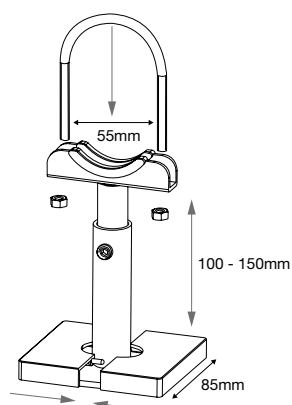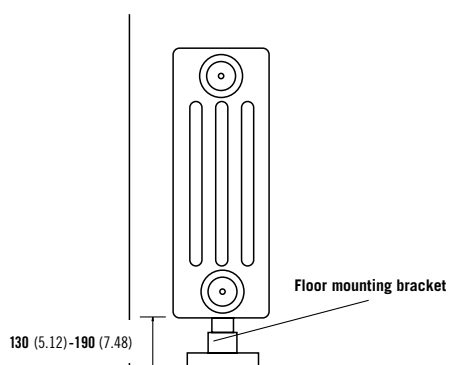

BRACKET INSTALLATION

All dimensions in mm. Inches in brackets.

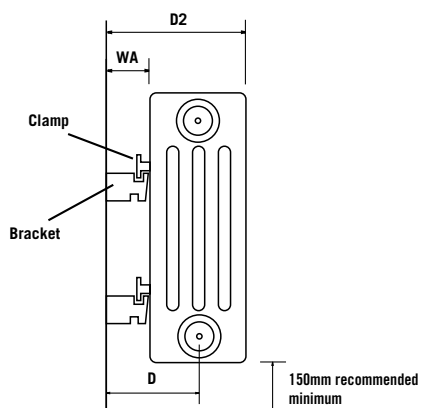

MEASUREMENTS USING 10mm CVD BRACKETS SLOT

Add 5mm if using 15mm slot

	WA	D	D2
2 Col	23	54	85
3 Col	23	73	123
4 Col	23	91	159

BRACKETS AND CLAMPS REQUIRED

	No of Sections
4	0 - 23
6	24 - 41

Number of columns	Wall to centre of connections		Wall to front face of radiator
	Using 10mm bracket slot	Using 15mm bracket slot	
2	54	59	85 or 90
3	73	78	123 or 128
4	91	96	159 or 164

All sizes (approximate) in mm


CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

COLUMN HORIZONTAL COLOURED

VALVE INSTALLATION

All dimensions in mm. Inches in brackets.

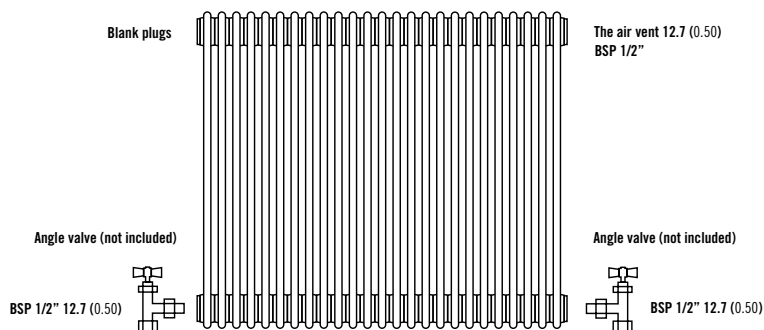


Note: Factory fitted bushes are welded in place and not removable.
If installing TBOE (Top Bottom Opposite End) please note that the radiator MUST be inverted.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	2 Columns		3 Columns			4 Columns
Height	500	600	300	500	600	600
W/m at 75/65/20	835	985	696	1122	1324	1734
n-coefficients	1.25	1.25	1.25	1.25	1.26	1.27
Heated surface area (m ² /m)	1.52	1.96	1.52	2.39	3.04	4.13
Weight (kg/m)	17.39	21.74	15.22	26.09	30.43	43.48
Water contents (l/m)	10.87	13.04	13.04	17.39	19.57	26.09
Wall to tap centre (mm)	54 / 59	54 / 59	73 / 78	73 / 78	73 / 78	91 / 96

PRESSURE DROPS

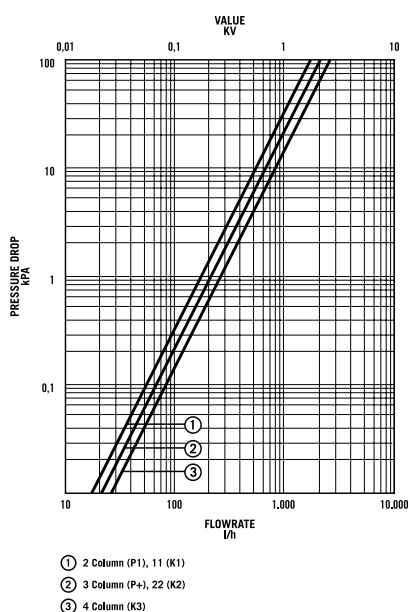

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

OPEN UP A WORLD OF COLOUR



RAL 9016
Traffic white

STANDARD COLOUR

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is now available in a variety of colours within 14 days.


RAL COLOURS



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white




9010
Pure white




9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black




7001
Silver grey




7011
Iron grey




7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey




7037
Dusty grey




7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue




5014
Pigeon blue



5015
Sky blue




5022
Night blue




5024
Pastel blue



6005
Light moss green




6018
Yellow green




6019
Pastel green



6020
Chrome green




6027
Light green



6033
Mint turquoise

Please note: the 14 day option is not applicable to configurable products.

COLOUR GUIDE



6034
Pastel turquoise




3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red




2003
Pastel orange



2008
Bright red orange



1004
Golden yellow



1016
Sulphur yellow



1021
Colza yellow



3015
Light pink




8014
Sepia



8017
Chocolate brown


METALLIC




1247M
Bronze metallic




7001M
Silver metallic




9007M
Grey metallic




7026M
Granite



1019M
Cappuccino



8028M
Terra brown



9011M
Graphite black

To request up to
5 colour samples, please
email sales@stelrad.com
or call **0800 876 6813** with your
choices and address details.

The colours shown are reproduced
as accurately as this printing
process will allow.



FOR FURTHER INFORMATION ON RAL COLOURS
PLEASE VISIT WWW.RALCOLORCHART.COM