

HOME

Column Vertical Coloured

BRINGING RADIATOR STYLE INTO UK HOMES



COLUMN VERTICAL COLOURED

50∆t

(75/65/20°C)


Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat o Watts	output Btu/hr
1800	352	9	2	163054h	868	2,962
	444	9	2	163055h	1,116	3,809
2000	352	9	2	163056h	966	3,297
	444	9	2	163057h	1,242	4,239
2500	352	9	2	163058h	1,197	4,085
	444	9	2	163059h	1,539	5,253

 Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

BRACKET INSTALLATION

All dimensions in mm. Inches in brackets.



MEASUREMENTS USING 10mm CVD BRACKETS SLOT

Add 5mm if using 15mm slot

	WA	D	D2
2 Col	23	54	85

Number of	Wall to of conn	Wall to		
columns	Using 10mm bracket slot	Using 15mm bracket slot	front face of radiator	
2	54	59	85 or 90	

CONNECTIONS

Each radiator comes with $\frac{1}{2}$ " inlet connections as standard.

Telephone: 0800 876 6813




COLUMN VERTICAL COLOURED

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Туре	2 Columns		
Height	1800	2000	
W/m at 75/65/20	2696	3000	
n-coefficients	1.31	1.31	
Heated surface area (m²/m)	6.09	6.74	
Weight (kg/m)	58.70	65.22	
Water contents (I/m)	32.61	36.96	
Wall to tap centre (mm)	54/59	54/59	

PRESSURE DROPS




- 1 2 Column (P1), 11 (K1)
- ② 3 Column (P+), 22 (K2) ③ 4 Column (K3)

CONNECTIONS

Each radiator comes with $\frac{1}{2}\slash$ inlet connections as standard.

VALVE INSTALLATION

All dimensions in mm. Inches in brackets.

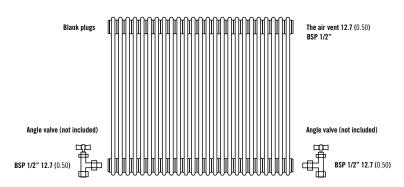

Note: Factory fitted bushes are welded in place and not removable. If installing TBDE (Top Bottom Opposite End) please note that the radiator MUST be inverted.

OPEN UP A WORLD OF COLOUR



RAL 9016 Traffic white

STANDARD COLOUR

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is now available in a variety of colours within 14 days.

RAL COLOURS



COLOUR GUIDE



METALLIC



To request up to
5 colour samples, please
email sales@stelrad.com
or call 0800 876 6813 with your
choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.



FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLORCHART.COM