

## CONCORD VERTICAL COLOURED Stelrad



### **50**∆t

(75/65/20°C) SINGLE DOUBLE

Height mm	Length mm	Stelrad UIN	Heat o	output Btu/h	Stelrad UIN	Heat o	output Btu/h
1800	444	448652h	852	2,907	448655h	1,254	4,279
	592	448653h	1,136	3,876	448656h	1,672	5,705
	740	448654h	1,420	4,845	448657h	2,090	7,131

 $\Delta$ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature  $heat source you may wish to consider \\ \Delta t40 or \\ \Delta t30 output (see your installer or system designer or download from www.stelrad.com).$ 

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Telephone: 0800 876 6813


## CONCORD VERTICAL COLOURED Stelrad



#### WALL MOUNTING INFORMATION


All dimensions in mm.


Туре	From back of radiator to wall		cer	wall to atre of ections	From front of radiator to wall	
Single Vertical	24mm	0.98inch	43mm	1.69inch	71mm	2.80inch
Double Vertical	40mm	1.57inch	67mm	2.64inch	95mm	3.74inch

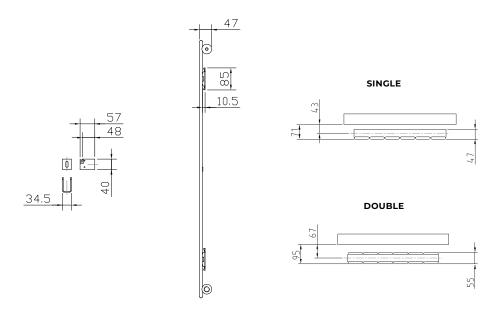

#### **FIXING POSITIONS - SINGLE & DOUBLE**

All dimensions in mm.

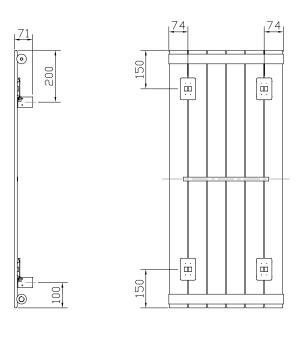

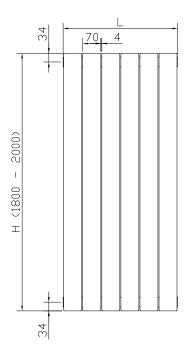

#### CONNECTIONS

Each radiator comes with ½" inlet connections as standard.






#### EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Туре	Vertical			
Height	1800	2000		
W/m at 75/65/20	1846	2041		
n-coefficients	1.31	1.31		
Heated surface area (m²/m)	4.01	4.42		
Weight (kg/m)	44.2	49.4		
Water contents (I/m)	14.3	16.9		
Wall to tap centre (mm)	43	43		

STEEL THICKNESS 1.25mm

#### PIPING INSTRUCTIONS



# OPEN UP A WORLD OF COLOUR




RAL 9016 Traffic white

#### STANDARD COLOUR

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is now available in a variety of colours within 14 days.

#### **RAL COLOURS**

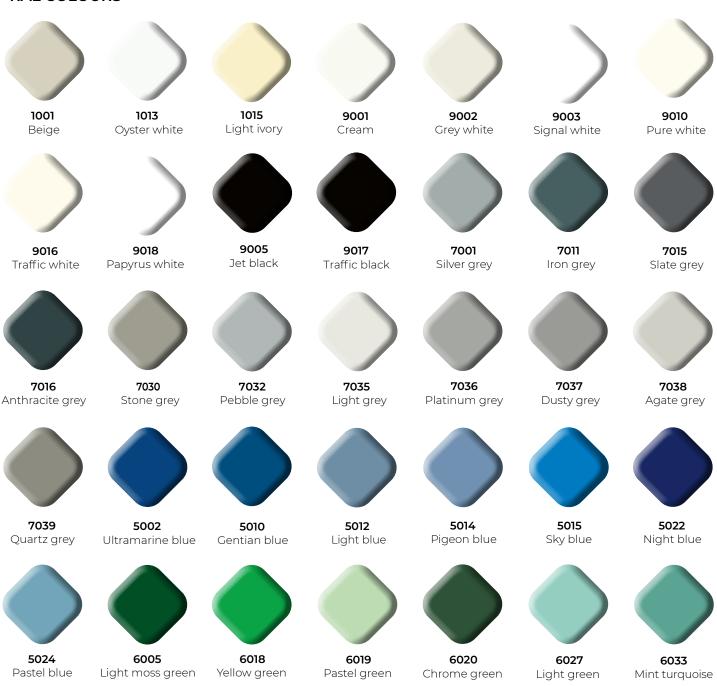

# **COLOUR GUIDE**



#### **METALLIC**



To request up to
5 colour samples, please
email sales@stelrad.com
or call 0800 876 6813 with your
choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.



FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLORCHART.COM