

HOME

SERIES



Classic
Towel Rail
Coloured

BRINGING RADIATOR STYLE INTO UK HOMES

CLASSIC TOWEL RAIL COLOUR

50 Δ t

(75/65/20°C)

STRAIGHT COLOUR

Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr
760	500	100	148070hc	376	1282
	600	100	148071hc	445	1517
1211	500	100	148072hc	576	1964
	600	100	148073hc	686	2339
1744	500	100	148074hc	844	2878
	600	100	148075hc	1000	3410

248 839
378 1292
453 1545
557 1889
657 2274

CURVED COLOUR


Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr
760	500	100	147006hc	376	1282
	600	100	147007hc	445	1517
1211	500	100	147008hc	576	1964
	600	100	147009hc	686	2339
1744	500	100	147010hc	844	2878
	600	100	147011hc	1000	3410

1292


Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.




STRAIGHT MODELS



CURVED MODELS




NUMBER OF TUBES ON TOWEL RAILS

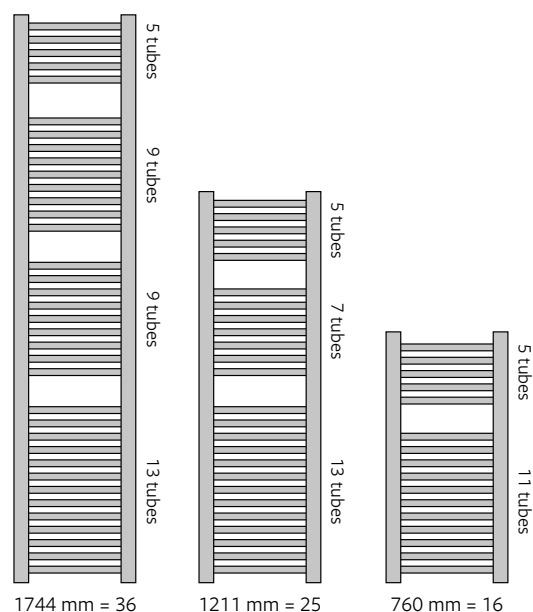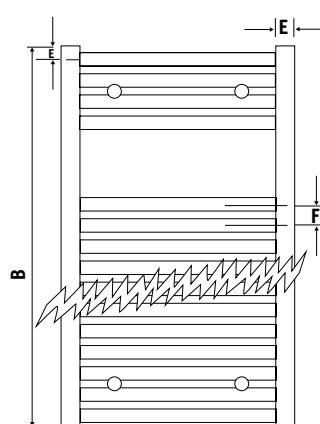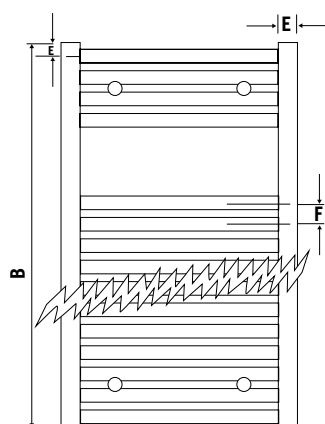

CLASSIC TOWEL RAIL COLOUR

		STRAIGHT MODELS					CURVED MODELS				
				WALL MOUNTING POSITIONS					WALL MOUNTING POSITIONS		
A Width (mm)	B Height (mm)	C Depth (mm)	D Tap Centres (mm)	EE (mm)	F (mm)	C (mm)	C Depth (mm)	D Tap Centres (mm)	EE (mm)	F (mm)	C (mm)
400	678	30	356	70	216	65-75	-	-	-	-	-
500	760	30	456	70	316	65-75	56.0	456	110	236	40-45
600	760	30	556	70	416	65-75	60.0	556	110	336	40-45
500	1211	30	456	70	316	65-75	56.0	456	110	236	40-45
600	1211	30	556	70	416	65-75	60.0	556	110	336	40-45
500	1744	30	456	70	316	65-75	56.0	456	110	236	40-45
600	1744	30	556	70	416	65-75	60.0	556	110	336	40-45

BRACKET POSITIONS



CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	STRAIGHT/CURVED WHITE					
No of tubes	16	16	25	25	36	36
Height	760	760	1211	1211	1744	1744
Length	500	600	500	600	500	600
Watts at 75/65/20	376	445	576	686	844	1000
n-coefficients	1.23	1.23	1.25	1.25	1.28	1.26
Heated surface area (m²)	0.71	0.83	1.11	1.30	1.60	1.88
Weight (kg)	6.12	7.06	9.63	11.10	13.86	15.98
Water contents (l/m)	4.41	5.10	6.89	7.97	9.80	11.40
KM (P/dTn)	3.0343	3.5743	4.285	5.2327	5.6826	7.1623

Type	STRAIGHT/CURVED CHROME					
No of tubes	16	16	25	25	36	36
Height	760	760	1211	1211	1744	1744
Length	500	600	500	600	500	600
Watts at 75/65/20	246	294	379	453	557	667
n-coefficients	1.25	1.25	1.28	1.27	1.30	1.30
Heated surface area (m²)	0.71	0.83	1.11	1.30	1.60	1.88
Weight (kg)	6.12	7.06	9.63	11.10	13.86	15.98
Water contents (l/m)	4.41	5.10	6.89	7.97	9.80	11.40
KM (P/dTn)	1.8179	2.1949	2.5779	3.1188	3.4249	4.1610

CLASSIC MINI TOWEL RAIL COLOUR

50 Δ t

(75/65/20°C)

COLOUR


Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr
678	400	100	147000hc	273	931

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

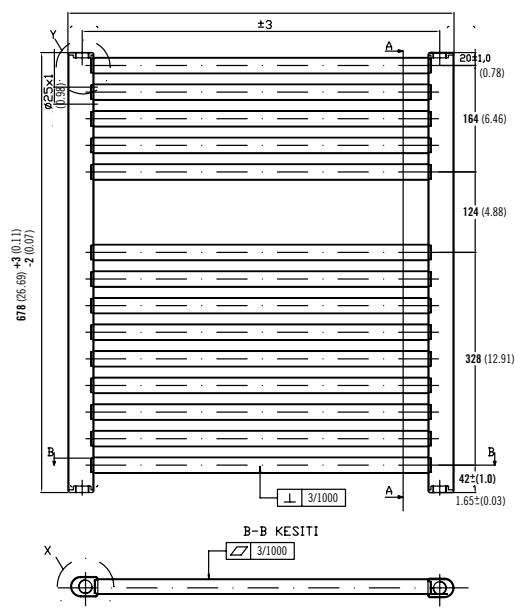

NUMBER OF TUBES ON TOWEL RAILS



EN 442 CERTIFICATION DATA -

CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	WHITE	CHROME
No of tubes	14	14
Height	678	678
Length	400	400
Watts at 75/65/20	273	175
n-coefficients	1.2232	1.2535
Heated surface area (m ² /m)	0.51	0.51
Weight (kg/m)	4.57	4.57
Water contents (l/m)	3.20	3.20
KM (P/dTn)	2.2803	1.2983

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

OPEN UP A WORLD OF COLOUR



RAL 9016
Traffic white

STANDARD COLOUR

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is now available in a variety of colours within 14 days.


RAL COLOURS



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white




9010
Pure white




9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black




7001
Silver grey




7011
Iron grey




7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey




7037
Dusty grey




7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue




5014
Pigeon blue



5015
Sky blue




5022
Night blue




5024
Pastel blue



6005
Light moss green




6018
Yellow green




6019
Pastel green



6020
Chrome green




6027
Light green



6033
Mint turquoise

Please note: the 14 day option is not applicable to configurable products.

COLOUR GUIDE



6034
Pastel turquoise




3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red




2003
Pastel orange



2008
Bright red orange



1004
Golden yellow



1016
Sulphur yellow



1021
Colza yellow



3015
Light pink




8014
Sepia



8017
Chocolate brown


METALLIC




1247M
Bronze metallic




7001M
Silver metallic




9007M
Grey metallic




7026M
Granite



1019M
Cappuccino



8028M
Terra brown



9011M
Graphite black

To request up to
5 colour samples, please
email sales@stelrad.com
or call **0800 876 6813** with your
choices and address details.

The colours shown are reproduced
as accurately as this printing
process will allow.



FOR FURTHER INFORMATION ON RAL COLOURS
PLEASE VISIT WWW.RALCOLORCHART.COM