

HOME


SERIES

Concord
Lo-Line
Coloured

CONCORD LO-LINE COLOURED

50 Δ t
(75/65/20°C)

DOUBLE



Height mm	Length mm	Elements	Stelrad UIN	Watts	Heat output Btu/hr
148	800	2	148456h	541	1846
	1000	2	148457h	676	2307
	1200	2	148458h	811	2767
	1400	2	148459h	946	3228
	1600	2	148460h	1082	3692
	1800	2	148461h	1217	4153
	2000	2	148462h	1352	4613
	2200	2	148463h	1487	5074
296	800	4	148464h	892	3044
	1000	4	148465h	1115	3805
	1200	4	148466h	1338	4565
	1400	4	148467h	1561	5326
	1600	4	148468h	1784	6087
	1800	4	148469h	2007	6848
	2000	4	148470h	2230	7609
	2200	4	148471h	2453	8370

Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

If feet are required, they must be ordered when you purchase your product. The feet are welded on and can not be added to the product once your order has been placed.

Optional extra to have no lugs. This needs specifying at the time of ordering. For floorstanding only.

FLOOR MOUNTING BRACKET INFORMATION


400 - 1400mm	2 feet
1600 - 2200mm	3 feet

CONCORD LO-LINE COLOURED

WALL MOUNTING INFORMATION



All dimensions in mm.

Type	From back of radiator to wall		From wall to centre of connections		From front of radiator to wall	
	mm	inch	mm	inch	mm	inch
Lo-line	25	0.98	97	3.81	125	4.92



FLOOR MOUNTING POSITIONS


All dimensions in mm. Inches in brackets. Must be specified at time of ordering as they are securely welded during manufacture.

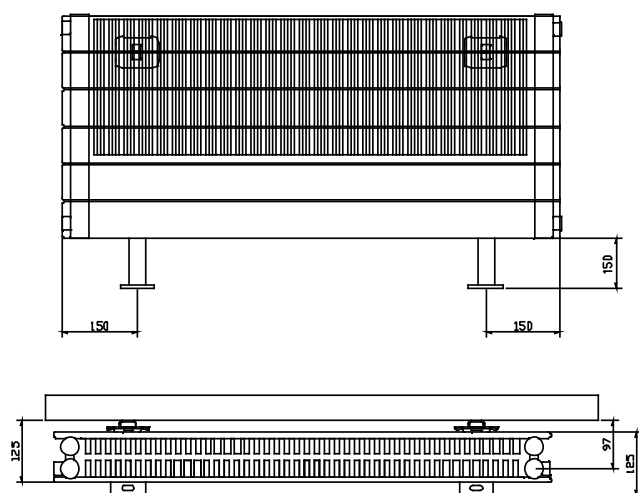


CONCORD LO-LINE COLOURED

LO-LINE FIXING POSITIONS


All dimensions in mm. Inches in brackets.




3 brackets 800 to 1400

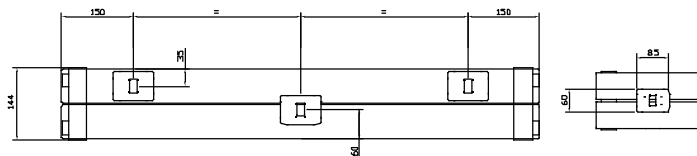

4 brackets 800 to 1400

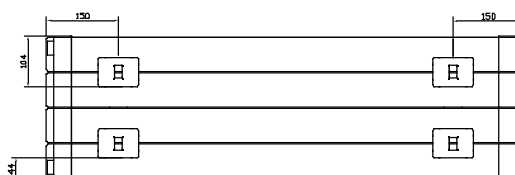



6 brackets 1600 to 2200

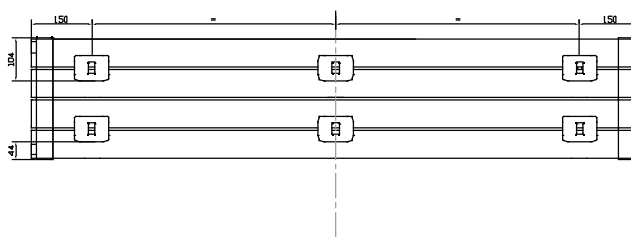

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING INSTRUCTIONS




EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Lo-Line	
Height	148	296
W/m at 75/65/20	676	1115
n-coefficients	1.25	1.28
Heated surface area (m²/m)	2.51	5.19
Weight (kg/m)	13.30	21.20
Water contents (l/m)	3.10	5.30
Wall to tap centre (mm)	98	98

STEEL THICKNESS 1.25mm

CONCORD LO-LINE COLOURED

PRESSURE DROPS

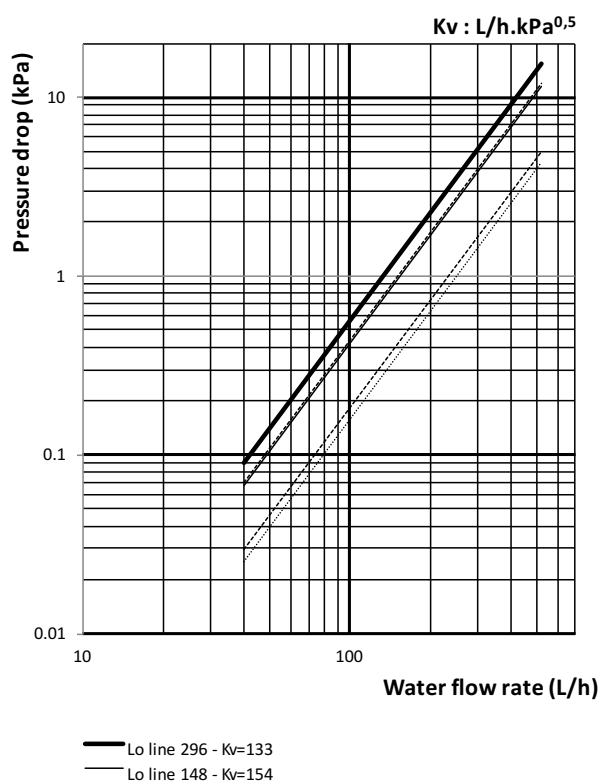

OPEN UP A WORLD OF COLOUR




RAL 9016
Traffic white

STANDARD COLOUR

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is now available in a variety of colours within 14 days.


RAL COLOURS



1001
Beige



1013
Oyster white



1015
Light ivory




9001
Cream



9002
Grey white



9003
Signal white




9010
Pure white




9016
Traffic white




9018
Papyrus white




9005
Jet black




9017
Traffic black




7001
Silver grey




7011
Iron grey




7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey




7037
Dusty grey




7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue




5014
Pigeon blue



5015
Sky blue




5022
Night blue




5024
Pastel blue



6005
Light moss green




6018
Yellow green




6019
Pastel green



6020
Chrome green




6027
Light green



6033
Mint turquoise

Please note: the 14 day option is not applicable to configurable products.

COLOUR GUIDE



6034
Pastel turquoise




3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red




2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow



1021
Colza yellow



3015
Light pink




8014
Sepia



8017
Chocolate brown


METALLIC




1247M
Bronze metallic




7001M
Silver metallic




9007M
Grey metallic




7026M
Granite



1019M
Cappuccino



8028M
Terra brown



9011M
Graphite black

To request up to
5 colour samples, please
email sales@stelrad.com
or call **0800 876 6813** with your
choices and address details.

The colours shown are reproduced
as accurately as this printing
process will allow.



FOR FURTHER INFORMATION ON RAL COLOURS
PLEASE VISIT WWW.RALCOLORCHART.COM