

HOME

SERIES

Concord
Vertical
Concept

BRINGING RADIATOR STYLE INTO UK HOMES

50 Δ t
(75/65/20°C)

SINGLE



DOUBLE



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/h		Watts	Btu/h
1800	444	448652h	852	2,907	448655h	1,254	4,279
	592	448653h	1,136	3,876	448656h	1,672	5,705
	740	448654h	1,420	4,845	448657h	2,090	7,131

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



WARRANTY



IN STOCK




ANTHRACITE
GREY ONLY

www.stelrad.com
Telephone: 0800 876 6813

WALL MOUNTING INFORMATION


All dimensions in mm.

Type	From back of radiator to wall		From wall to centre of connections		From front of radiator to wall	
Single Vertical	24mm	0.98inch	43mm	1.69inch	71mm	2.80inch
Double Vertical	40mm	1.57inch	67mm	2.64inch	95mm	3.74inch

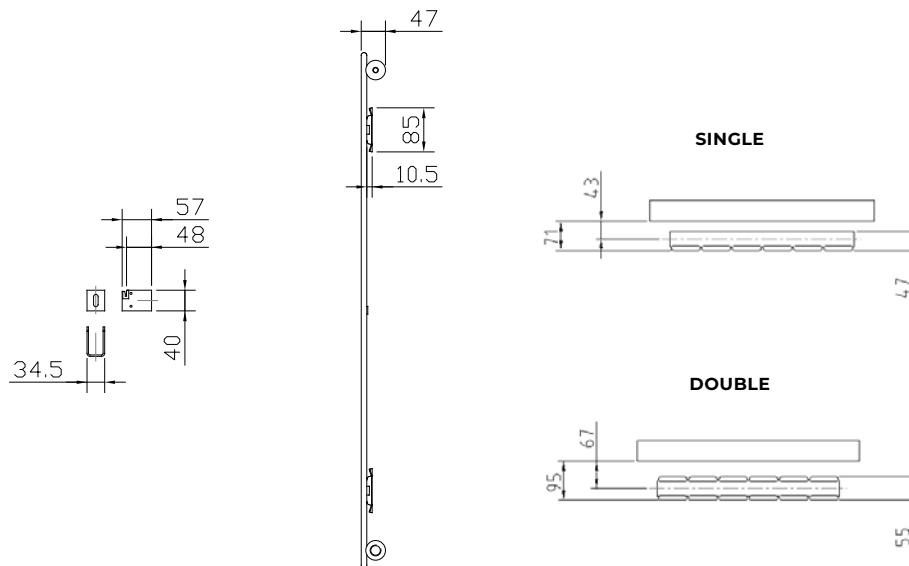

FIXING POSITIONS - SINGLE & DOUBLE

All dimensions in mm.

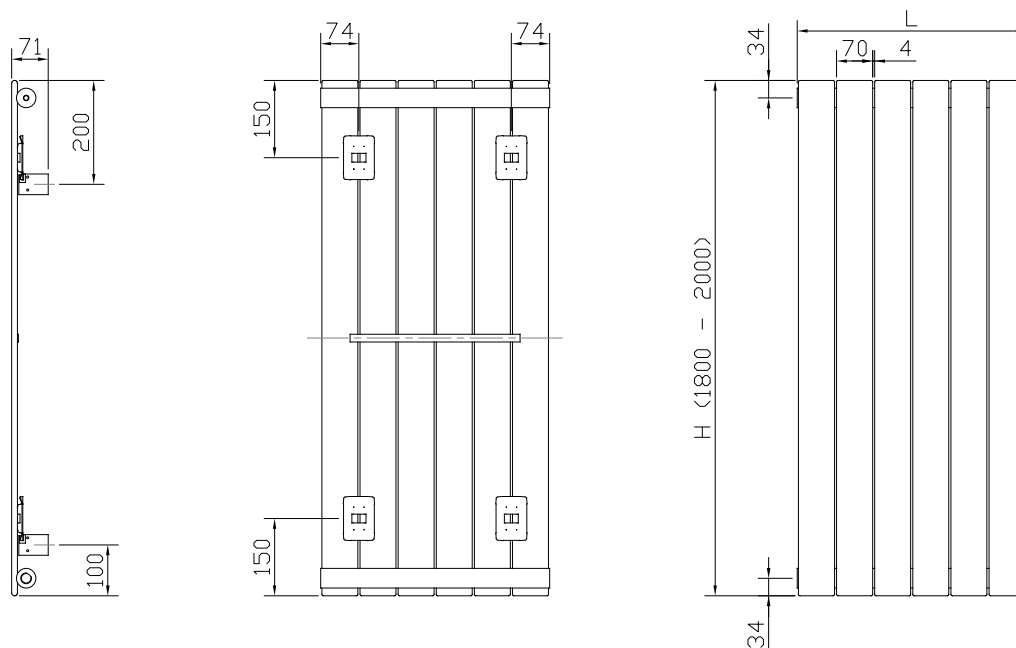

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Vertical Single		Vertical Double	
Height	1800	2000	1800	2000
W/m at 75/65/20	1919	2122	2824	3122
n-coefficients	1.31	1.31	1.32	1.32
Heated surface area (m ² /m)	3.99	4.40	7.73	8.56
Weight (kg/m)	41.45	45.66	79.41	87.84
Water contents (l/m)	14.19	15.68	15.00	16.49
Wall to tap centre (mm)	43	43	67	67

STEEL THICKNESS 1.25mm

PIPING INSTRUCTIONS

