

HOME

SERIES



Bathroom
Towel
Radiator

BRINGING RADIATOR STYLE INTO UK HOMES

BATHROOM TOWEL RADIATOR



50 Δ t

(75/65/20°C)

STRAIGHT

STRAIGHT CHROME

Height mm	Length mm	White UIN	Colour UIN	Heat output		White UIN	Heat output	
				Watts	Btu/hr		Watts	Btu/hr
760	500	148070h	148070hc	376	1,282	Stelrad	246	839
	600	148071h	148071hc	445	1,517	147003h	294	1,003
1211	500	148072h	148072hc	576	1,964	147004h	379	1,292
	600	148073h	148073hc	686	2,339	147005h	453	1,545
1744	500	148074h	148074hc	844	2,878	142768h	557	1,899
	600	148075h	148075hc	1,000	3,410	142769h	667	2,274

CURVED


CURVED CHROME

Height mm	Length mm	White UIN	Colour UIN	Heat output		Stelrad UIN	Heat output	
				Watts	Btu/hr		Watts	Btu/hr
760	500	147006h	147006hc	376	1,282	147012h	246	839
	600	147007h	147007hc	445	1,517	147013h	294	1,003
1211	500	147008h	147008hc	576	1,964	147014h	379	1,292
	600	147009h	147009hc	686	2,339	147015h	453	1,545
1744	500	147010h	147010hc	844	2,878	147016h	557	1,899
	600	147011h	147011hc	1,000	3,10	147017h	667	2,274


Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


STRAIGHT MODELS

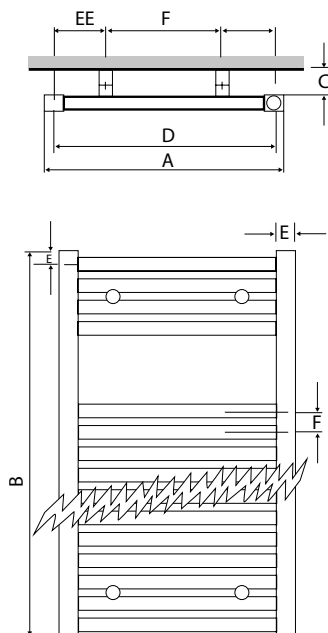

CURVED MODELS

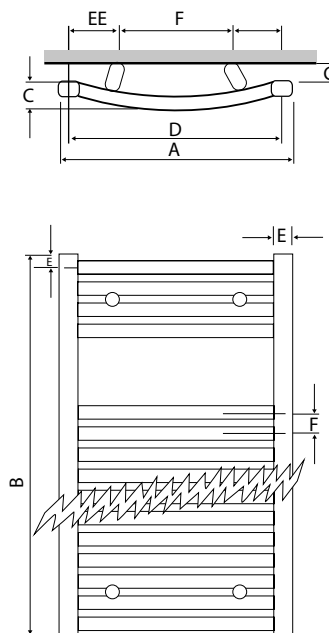

NUMBER OF TUBES ON TOWEL RAILS

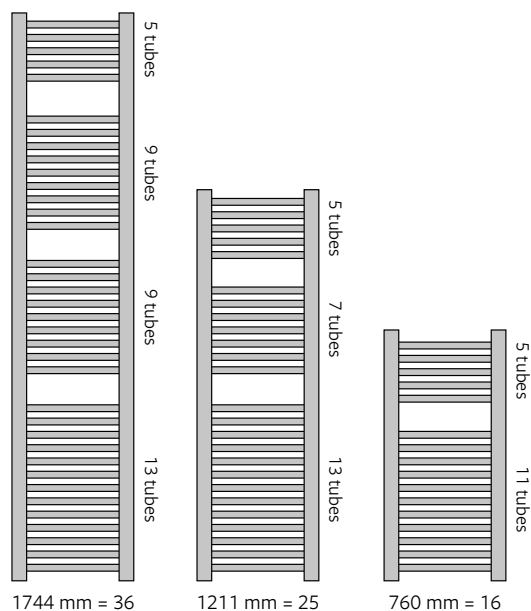


www.stelrad.com
Telephone: 0800 876 6813

BATHROOM TOWEL RADIATOR



		STRAIGHT MODELS					CURVED MODELS				
				WALL MOUNTING POSITIONS					WALL MOUNTING POSITIONS		
A Width (mm)	B Height (mm)	C Depth (mm)	D Tap Centres (mm)	EE (mm)	F (mm)	C (mm)	C Depth (mm)	D Tap Centres (mm)	EE (mm)	F (mm)	C (mm)
400	678	30	356	70	216	65-75	-	-	-	-	-
500	760	30	456	70	316	65-75	56.0	456	110	236	40-45
600	760	30	556	70	416	65-75	60.0	556	110	336	40-45
500	1211	30	456	70	316	65-75	56.0	456	110	236	40-45
600	1211	30	556	70	416	65-75	60.0	556	110	336	40-45
500	1744	30	456	70	316	65-75	56.0	456	110	236	40-45
600	1744	30	556	70	416	65-75	60.0	556	110	336	40-45

BRACKET POSITIONS



CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	STRAIGHT/CURVED WHITE					
No of tubes	16	16	25	25	36	36
Height	760	760	1211	1211	1744	1744
Length	500	600	500	600	500	600
Watts at 75/65/20	376	445	576	686	844	1000
n-coefficients	1.23	1.23	1.25	1.25	1.28	1.26
Heated surface area (m²)	0.71	0.83	1.11	1.30	1.60	1.88
Weight (kg)	6.12	7.06	9.63	11.10	13.86	15.98
Water contents (l/m)	4.41	5.10	6.89	7.97	9.80	11.40
KM (P/dTn)	3.0343	3.5743	4.285	5.2327	5.6826	7.1623

Type	STRAIGHT/CURVED CHROME					
No of tubes	16	16	25	25	36	36
Height	760	760	1211	1211	1744	1744
Length	500	600	500	600	500	600
Watts at 75/65/20	246	294	379	453	557	667
n-coefficients	1.25	1.25	1.28	1.27	1.30	1.30
Heated surface area (m²)	0.71	0.83	1.11	1.30	1.60	1.88
Weight (kg)	6.12	7.06	9.63	11.10	13.86	15.98
Water contents (l/m)	4.41	5.10	6.89	7.97	9.80	11.40
KM (P/dTn)	1.8179	2.1949	2.5779	3.1188	3.4249	4.1610

BATHROOM TOWEL RADIATOR



50Δt

(75/65/20°C)

WHITE

CHROME


Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
678	400	100	147000h	273	931	£83.66	£100.39	147001h	175	597	£164.04	£196.85

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

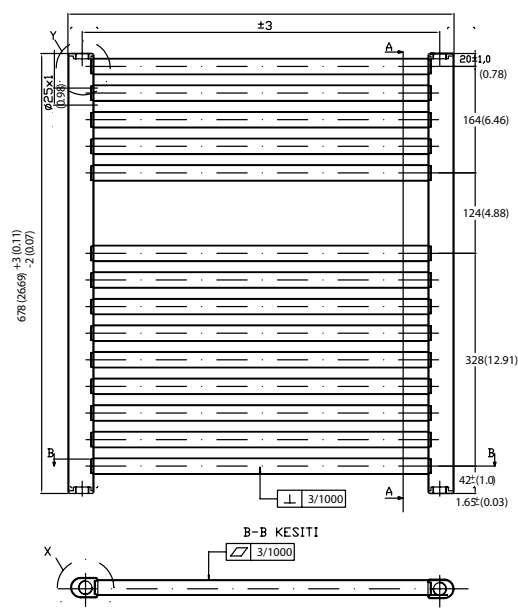

NUMBER OF TUBES ON TOWEL RAILS



EN 442 CERTIFICATION DATA -

CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	WHITE	CHROME
No of tubes	14	14
Height	678	678
Length	400	400
Watts at 75/65/20	273	175
n-coefficients	1.2232	1.2535
Heated surface area (m²/m)	0.51	0.51
Weight (kg/m)	4.57	4.57
Water contents (l/m)	3.20	3.20
KM (P/dTn)	2.2803	1.2983

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.


RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white




9003
Signal white




9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black



7001
Silver grey




7011
Iron grey




7015
Slate grey



7016
Anthacite grey




7030
Stone grey




7032
Pebble grey




7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey



7039
Quartz grey




5002
Ultramarine blue



5010
Gentian blue




5012
Light blue



5014
Pigeon blue




5015
Sky blue




5022
Night blue



RAL COLOURS (continued)




5024
Pastel blue




6005
Light moss green




6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise




3000
Flame red



3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow




1021
Colza yellow




3015
Light pink




8014
Sepia



8017
Chocolate brown



7026
Granite



1019
Cappuccino




8028
Terra brown




9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com