

# HOME

SERIES



Concord  
Co-Line

## 50 $\Delta$ t

(75/65/20°C)

DOUBLE



Height mm	Length mm	White UIN	Colour UIN	Heat output	
				Watts	Btu/hr
<b>148</b>	800	148456h	148456hc	541	1,846
	1000	148457h	148457hc	676	2,307
	1200	148458h	148458hc	811	2,767
	1400	148459h	148459hc	946	3,228
	1600	148460h	148460hc	1,082	3,692
	1800	148461h	148461hc	1,217	4,153
	2000	148462h	148462hc	1,352	4,613
<b>296</b>	800	148464h	148464hc	894	3,050
	1000	148465h	148465hc	1,118	3,815
	1200	148466h	148466hc	1,342	4,579
	1400	148467h	148467hc	1,565	5,340
	1600	148468h	148468hc	1,789	6,104
	1800	148469h	148469hc	2,012	6,865
	2000	148470h	148470hc	2,236	7,630

$\Delta$ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta$ t40 or  $\Delta$ t30 output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.

If feet are required, they must be ordered when you purchase your product. The feet are welded on and can not be added to the product once your order has been placed.

Optional extra to have no lugs. This needs specifying at the time of ordering. For floorstanding only.

## COLOUR OPTIONS



Comes in White as standard (RAL 9016).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.

### FLOOR MOUNTING BRACKET INFORMATION

400 - 1400mm	2 feet
1600 - 2200mm	3 feet



WARRANTY



MADE TO  
ORDER



DELIVERY WITHIN  
14 WORKING DAYS





WHITE  
IN STOCK

## WALL MOUNTING INFORMATION




All dimensions in mm.

Type	From back of radiator to wall		From wall to centre of connections		From front of radiator to wall	
	mm	inch	mm	inch	mm	inch
Lo-line	25	0.98	97	3.81	125	4.92

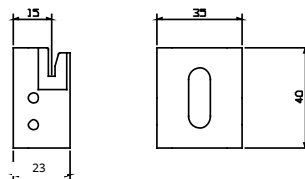


## FLOOR MOUNTING POSITIONS

All dimensions in mm. Must be specified at time of ordering as they are securely welded during manufacture.

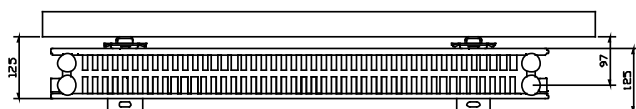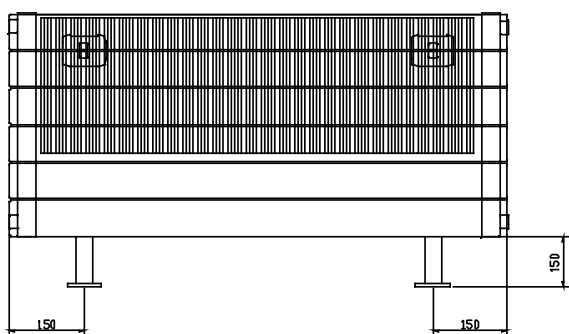


## LO-LINE FIXING POSITIONS


All dimensions in mm.




3 brackets 800 to 1400

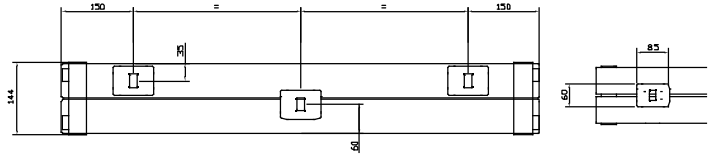

4 brackets 800 to 1400

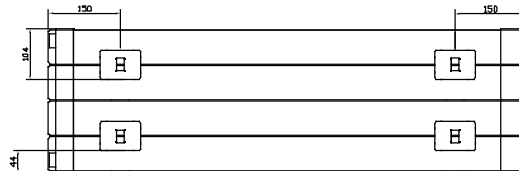



6 brackets 1600 to 2200

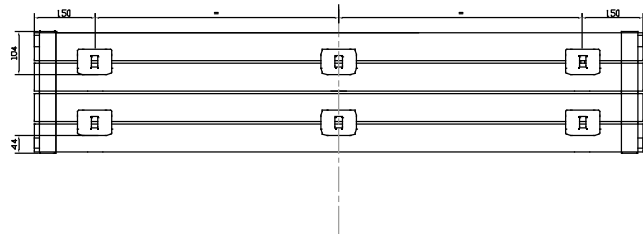

## CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

## PIPING INSTRUCTIONS



## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Lo-Line	
Height	148	296
W/m at 75/65/20	676	1118
n-coefficients	1.25	1.25
Heated surface area (m <sup>2</sup> /m)	1.05	1.95
Weight (kg/m)	11.74	22.06
Water contents (l/m)	2.44	4.89
Wall to tap centre (mm)	97	97

# 55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

**STANDARD COLOUR**




**RAL 9016**  
Traffic white

To request up to 5 colour samples, please email [sales@stelrad.com](mailto:sales@stelrad.com) or call **0800 876 6813** with your choices and address details.

*The colours shown are reproduced as accurately as this printing process will allow.*

**RAL COLOURS - Satin Finish**



**1001**  
Beige



**1013**  
Oyster white



**1015**  
Light ivory



**9001**  
Cream



**9002**  
Grey white



**9003**  
Signal white




**9010**  
Pure white



**9016**  
Traffic white




**9018**  
Papyrus white




**9005**  
Jet black




**9017**  
Traffic black



**7001**  
Silver grey



**7011**  
Iron grey




**7015**  
Slate grey



**7016**  
Anthacite grey




**7030**  
Stone grey




**7032**  
Pebble grey




**7035**  
Light grey




**7036**  
Platinum grey



**7037**  
Dusty grey




**7038**  
Agate grey



**7039**  
Quartz grey




**5002**  
Ultramarine blue




**5010**  
Gentian blue




**5012**  
Light blue



**5014**  
Pigeon blue



**5015**  
Sky blue




**5022**  
Night blue

*Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.*



## RAL COLOURS (continued)




**5024**  
Pastel blue




**6005**  
Light moss green



**6018**  
Yellow green




**6019**  
Pastel green




**6020**  
Chrome green



**6027**  
Light green



**6033**  
Mint turquoise



**6034**  
Pastel turquoise




**3000**  
Flame red



**3002**  
Carmine red



**3003**  
Ruby red



**3005**  
Wine red



**2003**  
Pastel orange



**2008**  
Bright red orange



**1004**  
Golden yellow




**1016**  
Sulphur yellow



**1021**  
Colza yellow




**3015**  
Light pink




**8014**  
Sepia




**8017**  
Chocolate brown



**7026**  
Granite



**1019**  
Cappuccino




**8028**  
Terra brown




**9011**  
Graphite black


## METALLIC



**1247M**  
Bronze metallic



**7001M**  
Silver metallic



**9007M**  
Grey metallic

*Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.*

For further information on RAL colours please visit  
[www.ralcolorchart.com](http://www.ralcolorchart.com)